

## Alpha-Pack-Bin APB 606-SN


with self-cleaning BERGMANN system. No regular cleaning under and behind the piston required, equipped for roll-on roll-off vehicles, particularly suitable for different types of <u>bulky waste</u>, <u>mainly cardboard</u>, paper or similar bulky and voluminous waste or secondary raw materials.

## Technical Details:

Integrated one-level hydraulic aggregate, compaction system: horizontal packer blade with patented throw-over blade, can be continuously fed with material, in every position of piston a huge inlet opening is available, no blocking during forward cycle, container walls are reinforced by welded steel prifiles with a distance of 600mm, side hinged discharge door with robust, recure triple locking device, packer blade control gives 100% compaction force over the complete cycle of 1.500mm.

## standard equipment of machine:

- \* hook points on both sides, hook height can be adjusted to 1.450 mm or 1.570 mm (fold down front hook, fixed hook on discharge door)
- \* plastic roller in front and at rear
- \* side hinged discharge, secure triple locking device
- \* pendulum roof for easy emptying
- \* single pump
- \* oil deficiency switch
- \* oil drip tray and central rainwater drain close to the tank room
- \* 2-component coating (80 μm) in RAL colour as requested

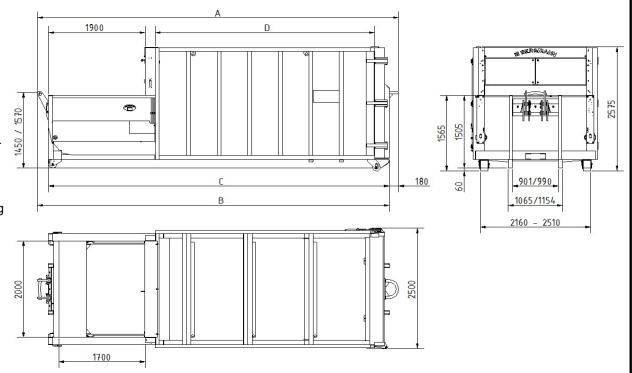

		Stand: 01.02.2021 Index: 005			All indicated dimensions are approximate dimensions! Subject to technical modifications!							
power:	5,5 kW	Туре:		maximum operating pressure [ bar ]	theoretical cylinder thrust [ kN ]	theoretical blade face pressure [ N / cm² ]	net weight [ kg ]	" A " [ mm ]	"B" [mm]	" C " [ mm ]	" D " [ mm ]	
fuse protection:	C 25A											
electrical connection:	400 V, 50 Hz, clockwise											
forward/return cycle speed:	35 s. / 36 s.	APB 606 - SN / 15	15	200	314	27,2	4.770	5.890	5.710	5.490	3.110	
		APB 606 - SN / 18	18	220	346	30,0	4.920	6.490	6.310	6.090	3.710	
displaced volume:	2,0 m³	APB 606 - SN / 20	20	220	346	30,0	5.150	7.090	6.910	6.690	4.310	
capacity charge box:	4,5 m³	APB 606 - SN / 23	23	220	346	30,0	5.410	7.690	7.510	7.290	4.910	