

Vertical balers

X-series



Baler X25

Fits into tight spaces and low ceilings

Internal cross cylinders make this baler very low in height and makes it easy to install.

Achieve high bale weight

The superior press force combined with a long stroke helps you achieve a high bale weight.

Highlights

- For various types of material – even expandable
- Large and wide chamber
- Retainers prevent in-chamber material expansion
- Short cycle time for fast clean up
- Moving parts are protected inside the machine
- Low overall height (<2 metres)

Optional Extras



Order your baler in a custom colour. Certain parts like top cover remain our standard grey.



Galvanized surface makes your baler environmentally resistant.



Gain remote control of your baler with our intelligent fleet monitoring system, BRA-IN.

Product details

Baler X25



Whisper

30 dB




Refrigerator

50 dB




X25 baler

59-60 dB



Other balers

75 dB





Cars on highway

100 dB



Turbojet engine

160 dB

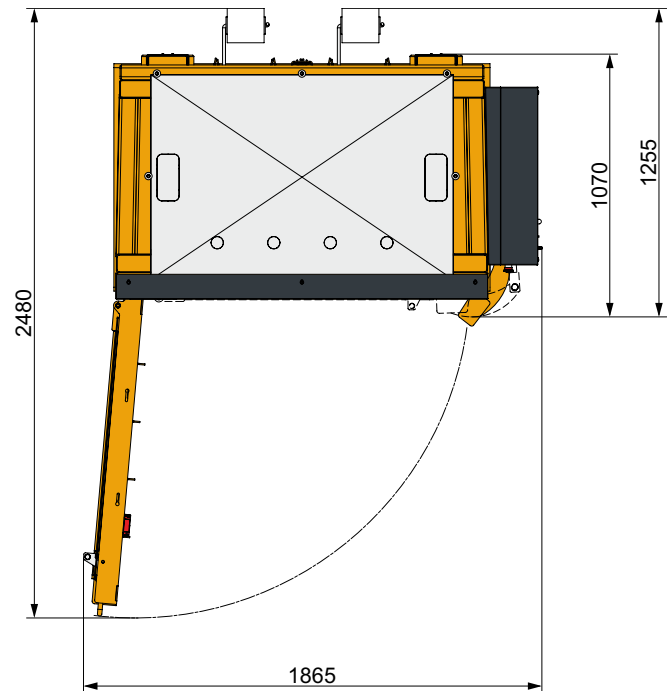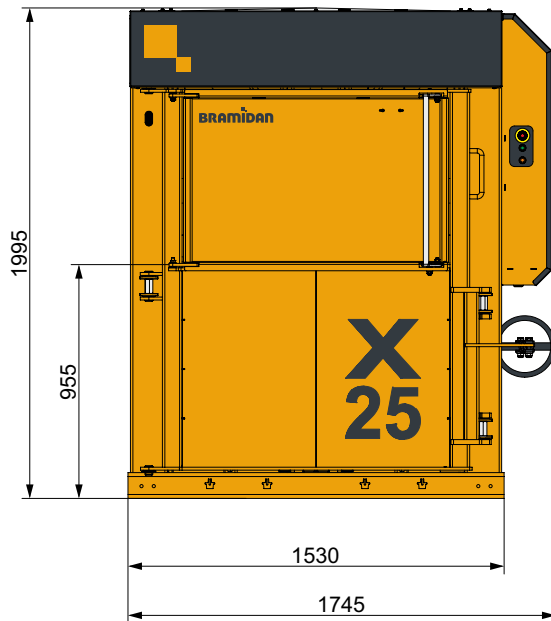

Technical specifications

Bale size WxDxH (mm)	1200 x 800 x 800
Feed opening WxH (mm)	1090 x 530
Power supply	3x400V 50Hz 16A
Motor (kW)	4.0
Cycle time avg. (sec)	23
Dimensions WxDxH (mm)	1760 x 1255 x 1995
Machine weight (kg)	1410
Stroke (mm)	950
Number of ties	4
Type of tying	Twine / Steel wire
Full bale light	Yes
Bale eject	Automatic



Bale weight

Cardboard (kg)	200-300
Plastic foil (kg)	250-350



Press force

25 t



Noise level

59-60 dB



Waste types

Cardboard, plastic foil, paper, PET bottles, alucans, tin cans, plastic hard, textile, EPS.

BRAMIDAN
www.bramidan.com

Bramidan A/S
Industrivej 69
6740 Bramming
Denmark
Tel: +45 7517 3266
bramidan@bramidan.dk